


# RAMMER RSS80R SCRAP SHEAR

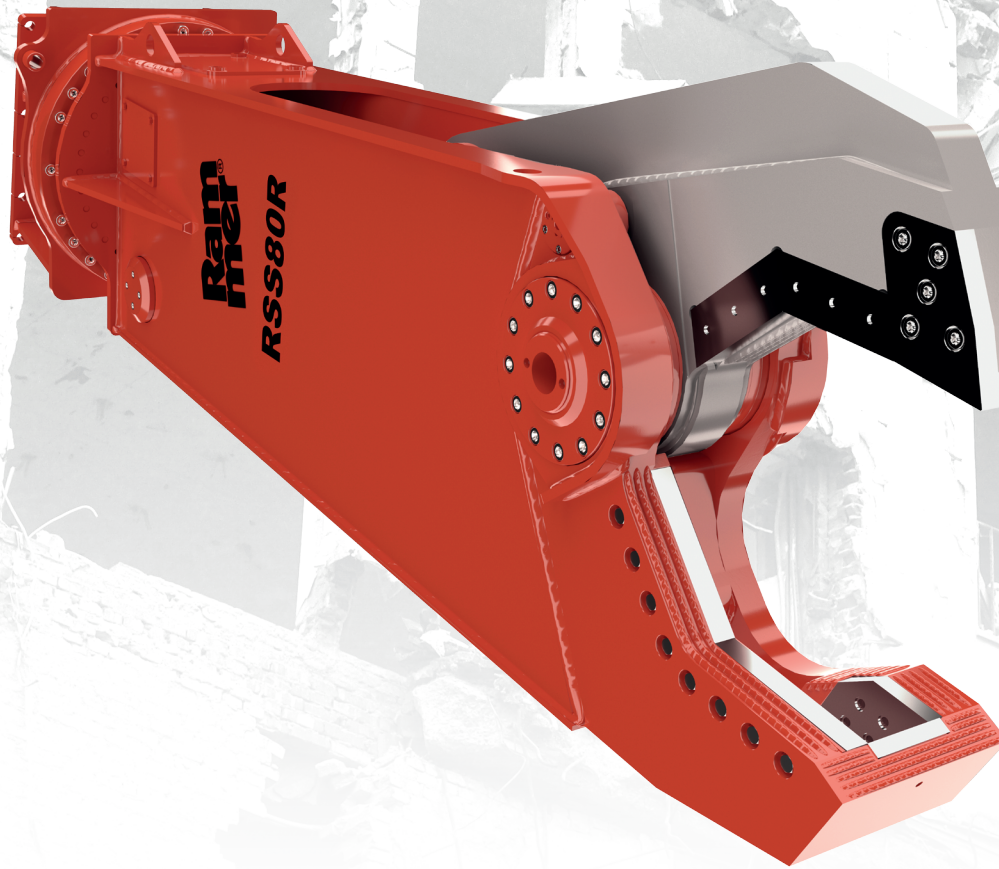

## HYDRAULIC ROTATION WITH PROTECTION VALVE

The protected rotation system allows precision tool placement, lowering/reducing owning and operating costs.

## BOLT ON, SYMMETRICAL CUTTER BLADES

Field replaceable and adjustable cutter blades minimize downtime and significantly increase the working life of wear parts

## SMART JAWS DESIGN FEATURING DOUBLE GUIDE

Avoids material to stuck between the jaws which increases productivity and cutting capacity

## SPEED VALVE

Shorter working cycles to increase productivity

## HYDRAULIC CYLINDER SHIELDING

The cylinders are fully protected throughout the working cycle. Increasing durability and extending service intervals.

## REPLACEABLE PEARCING TIP

A bolt on pearcing tip, removes the need for welding and rebuilding which lowers the cost of owning and operation.

## FIELD REPLACEABLE AND ADJUSTABLE CENTRAL PIN

Enables the operator to maintain the product on the site keeping cutting capacity on the maximum level.

## RSS SCRAP SHEARS

The RSS Scrap Shears can be used in every industrial demolition job involving the cutting and recovery of ferrous materials such as iron sections, pipes, tanks, railway carriages etc

**Ram  
mer**<sup>®</sup>

# RSS80R

## SPECIFICATIONS

Working weight, stick mounted, kg	7700
Working weight, boom mounted, kg	7900
Operating pressure, bar	320-350
Oil flow range, l/min	500-600
Rotation working pressure, bar	140-150
Rotation oil flow, l/min	50-60
Carrier weight stick mounted, ton	70-90
Carrier weight boom mounted, ton	45-60

Height 4300 mm

Jaws depth 840 mm

Max. jaws opening 830 mm

Sandvik Mining and Construction Oy  
Taivalkatu 8, P.O.Box 165  
FI-15101 Lahti, Finland  
Phone Int. +358 205 44 151  
[www.rammer.com](http://www.rammer.com)

**Ram  
mer**<sup>®</sup>